

SITE DATA:

ZONING: EF (WX-7 & WX-5)
 MAX. HEIGHT LIMIT: WX-5 = 60 FT.; WX-7 = 90 FT.

PROPOSED HEIGHTS: BUILDING 1 = 69.3 FT.; BUILDING 2 = 55.5 FT.

REQUIRED SETBACKS: TYP. A FRONTAGE 0' MIN./10' MAX.

PROPOSED SETBACKS: TYP. B FRONTAGE 0' MIN./85' MAX.

BUILD TO ZONE DISTANCES:
 FORDHAM BLVD. SERVICE RD.
 (536' OF R/W x .60=322' REQUIRED BUILDING FACADE IN THE BTZ; 400' PROVIDED)

PROPOSED COLLECTOR STREET
 (946.5 OF R/W x .80=758' REQUIRED BUILDING FACADE IN THE BTZ; 596' PROVIDED)

LEGION ROAD
 (250' OF R/W x .60=150' REQUIRED BUILDING FACADE IN THE BTZ; 227' PROVIDED)

AREA: NLA = 286,102 SF; GLA = 314,712 SF

PROPOSED DISTURBED AREA = 313,927 SF

IMPERVIOUS SURFACE AREA: 168,463 (EXISTING); 193,246 SF (PROPOSED)

ACTIVE RECREATION AREA SPACE: 37,766 SF (REQUIRED); 40,422 SF (PROVIDED)

PROPOSED FLOOR AREA = 388,088 SF

PROPOSED TOTAL # UNITS = 323

PROPOSED VEHICLE PARKING = 455 SPACES

PROPOSED BICYCLE PARKING = 162 SPACES


HILLSTONE CHAPEL HILL

SITE PLAN DRAWINGS


TOWN OF CHAPEL HILL, ORANGE COUNTY, NORTH CAROLINA
 2016-12-07

PREPARED FOR:
 OWNER/DEVELOPER
LEON CAPITAL GROUP
 5970 FAIRVIEW ROAD, SUITE 450
 CHARLOTTE, NORTH CAROLINA 28210

SHEET LIST TABLE				
SHEET	PAGE	DESCRIPTION	DATE SUBMITTED	DATE REVISED
CS0001	1	COVER SHEET	12/7/2016	4/7/2017
CS0002	2	GENERAL NOTES AND LEGEND	12/7/2016	4/7/2017
CS0201	3	EXISTING CONDITIONS PLAN	12/7/2016	4/7/2017
CS0500	4	CONSTRUCTION MANAGEMENT PLAN	12/7/2016	4/7/2017
CS0501	5	DEMOLITION PLAN	12/7/2016	4/7/2017
CS1001	6	OVERALL SITE PLAN	12/7/2016	4/7/2017
CS1002	7	SITE PLAN	12/7/2016	4/7/2017
CS1003	8	SITE PLAN	12/7/2016	4/7/2017
CS1501	9	GRADING PLAN	12/7/2016	4/7/2017
CS1502	10	GRADING PLAN	12/7/2016	4/7/2017
CS1701	11	UTILITY PLAN	12/7/2016	4/7/2017
CS1702	12	UTILITY PLAN	12/7/2016	4/7/2017
CS2201	13	LIGHTING PLAN	12/7/2016	4/7/2017
CS2701	14	LEGION ROAD WIDENING PLAN	12/7/2016	4/7/2017
CS3501	15	PROPOSED ROAD PLAN AND PROFILE	12/7/2016	4/7/2017
CS3502	16	PROPOSED ROAD PLAN AND PROFILE	12/7/2016	4/7/2017
CS3503	17	NEW STREET CROSS SECTIONS	4/7/2017	4/7/2017
CS3601	18	EASEMENTS AND RIGHT-OF-WAY PLAN	2/20/2017	4/7/2017
CS6001	19	SITE DETAILS	12/7/2016	4/7/2017
CS6021	20	DRAINAGE DETAILS	12/7/2016	2/20/2017
CS6022	21	UNDERGROUND DETENTION EAST DETAILS	2/20/2017	4/7/2017
CS6023	22	UNDERGROUND DETENTION DETAILS	2/20/2017	4/7/2017
CS6024	23	UNDERGROUND DETENTION WEST DETAILS	2/20/2017	4/7/2017
CS6041	24	O.W.A.S.A. DETAILS	12/7/2016	4/7/2017
CS8001	25	EROSION AND SEDIMENTATION CONTROL PLAN	12/7/2016	4/7/2017
CS8501	26	EROSION AND SEDIMENTATION CONTROL DETAILS	12/7/2016	4/7/2017
LP1.1		CODE COMPLIANT LANDSCAPE PLAN		
LP2.1		TREE PROTECTION PLAN		
LP3.1		LANDSCAPE DETAILS AND NOTES		
LA3.01		LANDSCAPE ARCHITECTURE DETAILS		
LA5.00		COA DESIGN ALTERNATIVE SUMMARY PLAN		
LA5.01		PEDESTRIAN GATEWAY 1 & PEDESTRIAN CONNECTOR 1 LAYOUT PLAN		
LA5.04		PEDESTRIAN PLAZA LAYOUT PLAN		
LA5.07		PEDESTRIAN CONNECTOR 2 LAYOUT PLAN		
LA5.10		PEDESTRIAN GATEWAY 2, LEGION RD. & PEDESTRIAN COLLECTOR STREET EAST LAYOUT PLAN		
LA5.13		COLLECTOR STREET WEST LAYOUT PLAN		
LA5.16		FORDHAM BLVD. SERVICE ROAD LAYOUT PLAN		
LA6.01		ZONING PLAN BUILDING 1		
LA6.02		ZONING PLAN BUILDING 2		
LA6.03		OUTDOOR AMENITY & RECREATION SPACE PLAN		
GA2.00		BUILDING 1 PLAN - LOWER LEVEL		
GA2.01		BUILDING 1 PLAN - LEVEL 1		
GA2.11		BUILDING 2 PLAN - LEVEL 1		
GA2.12		BUILDING 2 PLAN - LEVEL 2		
GA3.01a		BUILDING 1 ELEVATIONS		
GA3.02a		BUILDING 2 ELEVATIONS		

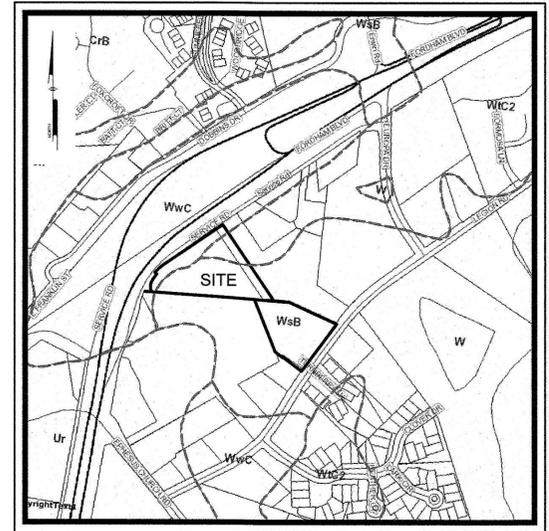


SOILS MAP
 Scale: 1" = 500'

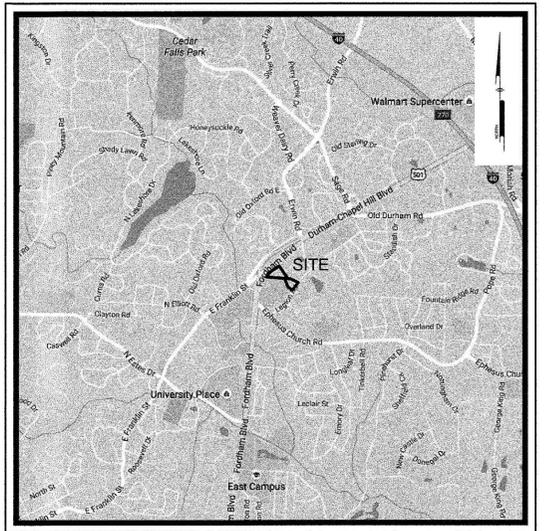



LOCATION MAP
 1" = 3000'

PREPARED BY:

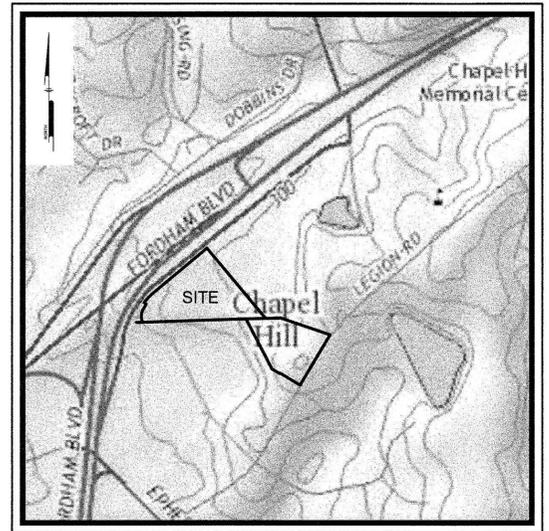

USGS MAP
 Scale: 1" = 500'


P:\Projects\2016\2016-12-07\2016-12-07.dwg
 P:\Projects\2016\2016-12-07\2016-12-07.dwg
 PLOTTED: 1/28/2017 12:38:54 PM BY: David Chay
 PROJECT STATUS: DESIGN DEVELOPMENT
 PLOT STYLE: Penwin.mpl

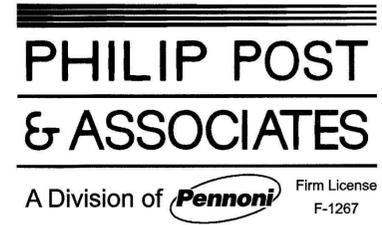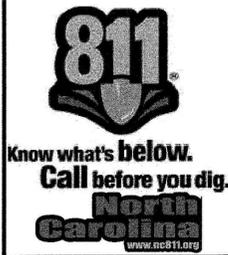

401 Providence Road #200
 Chapel Hill, NC 27514
 T 919.929.1173
 F 919.493.6548



NOT FOR CONSTRUCTION

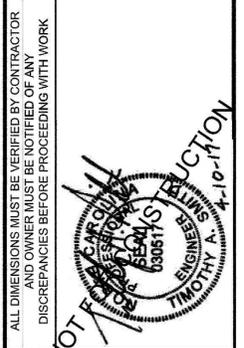

HILLSTONE CHAPEL HILL
 1730 FORDHAM BLVD.
 CHAPEL HILL, NORTH CAROLINA 27514

COVER SHEET

LEON CAPITAL GROUP
 5970 FAIRVIEW ROAD, SUITE 450
 CHARLOTTE, NORTH CAROLINA 28210

NO.	DATE	REVISIONS	BY
2	4/7/2017	TOWN COMMENT REVISIONS #2	WRA
1	2/20/2017	REVISIONS PER TOWN'S REVIEW COMMENTS	WRA

ALL DOCUMENTS PREPARED BY PENNONI ASSOCIATES ARE INSTRUMENTS OF SERVICE IN RESPECT OF THE PROJECT. THEY ARE NOT INTENDED OR REPRESENTED TO BE SUITABLE FOR REUSE BY OWNER OR OTHERS ON THE EXTENSIONS OF THE PROJECT OR ON ANY OTHER PROJECT. ANY REUSE WITHOUT WRITTEN VERIFICATION OR ADAPTATION BY PENNONI ASSOCIATES FOR THE SPECIFIC PURPOSE INTENDED WILL BE AT OWNERS SOLE RISK AND WITHOUT LIABILITY OR LEGAL EXPOSURE TO PENNONI ASSOCIATES. AND OWNER SHALL INDEMNIFY AND HOLD HARMLESS PENNONI ASSOCIATES FROM ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES ARISING OUT OF OR RESULTING THEREFROM.

PROJECT	LCGR1602
DATE	DECEMBER 7, 2016
DRAWING SCALE	AS NOTED
DRAWN BY	WRA
APPROVED BY	TAS

CS0001
 SHEET 1 OF 26

LEGEND		
EXISTING	PROPOSED	DESCRIPTION
		CABLE TV, JUNCTION BOX
		CABLE TV, MANHOLE
		CABLE TV, OVERHEAD
		CABLE TV, PANEL BOX
		CABLE TV, PEDESTAL
		CABLE TV, STUB OUT
		CABLE TV, UNDERGROUND
		CABLE TV, WITNESS POST
		CHANNEL
		COMMUNICATION, HANDHOLE
		COMMUNICATION, JUNCTION BOX
		COMMUNICATION, MANHOLE
		COMMUNICATION, OVERHEAD
		COMMUNICATION, PANEL BOX
		COMMUNICATION, PEDESTAL
		COMMUNICATION, STUB OUT
		COMMUNICATION, UNDERGROUND
		COMMUNICATION, WITNESS POST
		CONTROL, BENCHMARK
		CONTROL, GPS
		CONTROL, MAPPING
		CONTROL, REFERENCE
		CONTROL, TRAVERSE
		CURB
		CURB DEPRESSION
		EDGE OF PAVEMENT
		EDGE OF GRAVEL
		EASEMENT
		FENCE
		FIBER OPTIC, HANDHOLE
		FIBER OPTIC, JUNCTION BOX
		FIBER OPTIC, MANHOLE
		FIBER OPTIC, OVERHEAD
		FIBER OPTIC, PANEL BOX
		FIBER OPTIC, PEDESTAL
		FIBER OPTIC, STUB OUT
		FIBER OPTIC, UNDERGROUND
		FIBER OPTIC, WITNESS POST
		FLOODPLAIN
		FUEL, MANHOLE
		FUEL, OVERHEAD
		FUEL, PLUG
		FUEL, PUMP
		FUEL, UNDERGROUND
		GUIDE RAIL
		LIMITS OF DISTURBANCE
		MARKING, HANDICAP PARKING
		NATURAL GAS, METER
		NATURAL GAS, MANHOLE
		NATURAL GAS, OVERHEAD
		NATURAL GAS, STUB OUT
		NATURAL GAS, UNDERGROUND
		NATURAL GAS, WITNESS POST
		PHONE, HANDHOLE
		PHONE, JUNCTION BOX
		PHONE, MANHOLE
		PHONE, OVERHEAD
		PHONE, PANEL BOX
		PHONE, PEDESTAL
		PHONE, STUB OUT
		PHONE, UNDERGROUND
		PHONE, WITNESS POST
		POWER, GUY POLE
		POWER, GUY WIRE
		POWER, HANDHOLE
		POWER, JUNCTION BOX
		POWER, SINGLE HEAD LIGHT
		POWER, DOUBLE HEAD LIGHT
		POWER, THREE HEAD LIGHT
		POWER, FOUR HEAD LIGHT
		POWER, LIGHT
		POWER, SPOT LIGHT
		POWER, LIGHT POLE SINGLE
		POWER, LIGHT POLE DOUBLE
		POWER, MANHOLE
		POWER, OVERHEAD
		POWER, METER
		POWER, PANEL BOX
		POWER, PEDESTAL
		POWER, STUB OUT
		POWER, TRANSFORMER
		POWER, UNDERGROUND
		POWER, UTILITY POLE
		POWER, WITNESS POST
		POWER, YARD LIGHT
		PROPERTY, LINE
		LEGAL, RIGHT-OF-WAY
		PROPERTY, CORNER FOUND
		PROPERTY, CORNER FOUND (OTHERS)
		PROPERTY, CONCRETE MONUMENT
		PROPERTY, ADJOINING LINED
		PROPERTY, LINE RESERVED
		RAIL, MILE MARKER
		RAIL, PANEL BOX
		RAIL, TRACK
		SITE, AIR COMPRESSOR
		SITE, AIR CONDITIONER
		SITE, BOLLARD
		SITE, BORING LOCATION
		BUILDING
		SITE, FLAG POLE
		SITE, HEAD STONE
		SITE, MAIL BOX
		SITE, MONITOR WELL
		SITE, PARKING METER
		SITE, POST
		SITE, SIGN POST AND BOARD
		SITE, TRAFFIC SIGN
		SOIL, BOUNDARY
		SOIL, LABEL

GENERAL NOTES:

- APPLICANT: LEON CAPITAL GROUP LLC, 5970 FAIRVIEW ROAD, SUITE 200, CHARLOTTE, NORTH CAROLINA 28212. RESPONSIBLE OFFICER: BRIAN NICHOLSON.
- EXISTING TOPOGRAPHIC FEATURES WERE TAKEN FROM A TOPOGRAPHIC SURVEY PLAN PROVIDED BY PHILIP POST & ASSOC. DATED: 6/03/2016.
- UTILITY NOTES:
 - COMPLETENESS OR ACCURACY OF LOCATION AND DEPTH OF UNDERGROUND UTILITIES AND STRUCTURES IS NOT GUARANTEED.
 - LOCATION OF ALL EXISTING AND PROPOSED SERVICES ARE APPROXIMATE AND SHALL BE CONFIRMED INDEPENDENTLY WITH LOCAL UTILITY COMPANIES PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION. SANITARY SEWER AND ALL OTHER UTILITY SERVICE CONNECTION POINTS SHALL BE CONFIRMED INDEPENDENTLY BY THE CONTRACTOR IN THE FIELD PRIOR TO THE COMMENCEMENT OF CONSTRUCTION. ALL DISCREPANCIES SHALL BE REPORTED IMMEDIATELY IN WRITING TO THE ENGINEER. CONSTRUCTION SHALL COMMENCE BEGINNING AT THE LOWEST INVERT (POINT OF CONNECTION) AND PROGRESS UP GRADIENT. PROPOSED INTERFACE POINTS (CROSSINGS) WITH EXISTING UNDERGROUND UTILITIES SHALL BE FIELD VERIFIED BY TEST PIT PRIOR TO COMMENCEMENT OF CONSTRUCTION.
 - ALL UTILITIES AND SERVICES INCLUDING BUT NOT LIMITED TO GAS, WATER, ELECTRIC, SANITARY AND STORM SEWER, TELEPHONE, CABLE, FIBER OPTIC, ETC. WITHIN THE LIMITS OF DISTURBANCE SHALL BE VERTICALLY AND HORIZONTALLY LOCATED. THE CONTRACTOR SHALL USE AND COMPLY WITH THE REQUIREMENTS OF THE APPLICABLE UTILITY NOTIFICATION SYSTEM TO LOCATE ALL THE UNDERGROUND UTILITIES. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRS OF DAMAGE TO ANY EXISTING UTILITIES DURING CONSTRUCTION AT NO COST TO THE OWNER.
- AS SHOWN ON THE FLOOD INSURANCE RATE MAP FOR ORANGE COUNTY, NC, MAP #371097900K, EFFECTIVE DATE 2/22/2017, THE SITE AREA PROPOSED TO BE DEVELOPED LIES WITHIN "ZONE X" DEFINED AS AREAS DETERMINED TO BE OUTSIDE THE 100 YEAR FLOOD PLAIN.
- FIRE WATCH: DURING CONSTRUCTION AND DEMOLITION WHERE HOT WORK, MATERIALS SUBJECT TO SPONTANEOUS COMBUSTION, OR OTHER HAZARDOUS CONSTRUCTION OR DEMOLITION IS OCCURRING, THE OWNER OR THEIR DESIGNEE SHALL BE RESPONSIBLE FOR MAINTAINING A FIRE WATCH. THE FIRE WATCH SHALL CONSIST OF AT LEAST ONE PERSON WITH A MEANS OF COMMUNICATING AN ALARM TO 911. SHALL A WRITTEN ADDRESS POSTED IN A CONSPICUOUS LOCATION AND SHALL MAINTAIN CONSTANT PATROLS. NC FFC 2012 SECTION 1404.
- CONSTRUCTION/DEMOLITION: ALL CONSTRUCTION AND DEMOLITION CONDUCTED SHALL BE IN COMPLIANCE OF THE CURRENT EDITION OF CHAPTER 14 OF THE NC FFC.
- PRIOR TO ISSUANCE OF A CERTIFICATE OF OCCUPANCY APPLICANT SHALL REPLACE ANY TREES SHOWN AS PRESERVED/PROTECTED ON THE LANDSCAPE PROTECTION PLAN THAT HAVE DIED OR ARE IN POOR HEALTH AS A RESULT OF LAND DISTURBING ACTIVITIES.
- PRIOR TO ISSUANCE OF A ZONING COMPLIANCE PERMIT APPLICANT SHALL RECORD A RECOMBINATION PLAN FOR THE FOUR PARCELS WITH THE ORANGE COUNTY REGISTRY. AN EXEMPT PLAN APPLICATION TO BE REVIEWED AND APPROVED BY THE TOWN IS REQUIRED FOR THIS ACTION.
- A DEMOLITION PERMIT WILL BE REQUIRED FROM THE TOWN OF CHAPEL HILL PRIOR TO THE REMOVAL OF THE EXISTING BUILDING ON SITE.
- THE SWIMMING POOL WILL REQUIRE APPROVAL FROM ORANGE COUNTY HEALTH DEPARTMENT AT THE TIME OF PERMITTING.
- SITE DISTURBANCE 7.20 AC.

LEGEND		
EXISTING	PROPOSED	DESCRIPTION
		SANITARY SEWER, CLEAN-OUT
		SANITARY SEWER, FORCE MAIN
		SANITARY SEWER, FORCE MAIN MANHOLE
		SANITARY SEWER, FORCE STUB OUT
		SANITARY SEWER, LATERAL
		SANITARY SEWER, MANHOLE
		SANITARY SEWER, UNDERGROUND (4" DIA TO 10" DIA)
		SANITARY SEWER, SEPTIC TANK
		SANITARY SEWER, STUB OUT
		SANITARY SEWER, VALVE
		SANITARY SEWER, WITNESS POST
		STREAM
		STORM SEWER, INLET
		STORM SEWER, HEADWALL
		STORM SEWER, MANHOLE
		STORM SEWER, UNDERGROUND
		STORM SEWER, ROOF DRAIN
		STORM SEWER, STAND PIPE
		STORM SEWER, CLEAN-OUT
		STORM SEWER, WITNESS POST
		MINOR CONTOUR
		MAJOR CONTOUR
		SPOT ELEVATION TO BE REMOVED
		TRAFFIC, PAVEMENT MARKING, BIKE LANE
		TRAFFIC, PAVEMENT MARKING, TURN ARROWS
		TRAFFIC, PAVEMENT MARKING, HOV LANE
		TRAFFIC, HAND HOLE
		TRAFFIC, JUNCTION BOX
		TRAFFIC, MANHOLE
		TRAFFIC, PANEL BOX
		TRAFFIC, PEDESTAL
		TRAFFIC, PEDESTRIAN SIGNAL
		TRAFFIC, SIGNAL POLE
		TRAFFIC, SIGNAL POLE & LIGHT ARM
		TRAFFIC, STUB OUT
		VEGETATION, SHRUB
		VEGETATION, STUMP
		VEGETATION, DECIDUOUS SHOWING CANOPY
		VEGETATION, CONIFEROUS SHOWING CANOPY
		VEGETATION, TREE LINE
		WATER, HOSE BIB
		WATER, FIRE HYDRANT
		WATER, IRRIGATION HEAD
		WATER, IRRIGATION VALVE BOX
		WATER, MANHOLE
		WATER, METER
		WATER, POST INDICATOR VALVE
		WATER, SIAMESE CONNECTION
		WATER, STUB OUT
		WATER, UNDERGROUND
		WATER, UNDERGROUND FIRE
		WATER, VALVE
		WATER, WITNESS POST

GENERAL CONSTRUCTION AND GRADING NOTES:

- ALL WORK SHALL COMPLY WITH APPLICABLE STATE, FEDERAL AND LOCAL CODES AND OSHA STANDARDS. ALL NECESSARY LICENSES AND PERMITS SHALL BE OBTAINED BY THE CONTRACTOR AT HIS EXPENSE UNLESS PREVIOUSLY OBTAINED BY THE OWNER/DEVELOPER.
- THE CONTRACTOR SHALL BE REQUIRED TO REVIEW AND ABIDE BY SPECIFICATIONS OF THE PLAN AND ALL SUPPORTING DOCUMENTS, PERMITS, AND REPORTS FOR THIS SITE, INCLUDING BUT NOT LIMITED TO:
 - EROSION AND SEDIMENTATION CONTROL PLAN
 - STORMWATER MANAGEMENT PLAN.
- THE CONTRACTOR SHALL IMMEDIATELY INFORM THE ENGINEER OF ANY DISCREPANCIES OR ERROR THEY DISCOVER IN THE PLANS.
- DEVIATION FROM THESE PLANS AND NOTES WITHOUT THE PRIOR CONSENT OF THE OWNER OR HIS REPRESENTATIVE OR THE ENGINEER MAY BE CAUSE OF THE WORK TO BE UNACCEPTABLE.
- UTILITY COORDINATION SHALL BE INCLUDED IN THE PROJECT SCHEDULE AND IT IS THE EXPLICIT RESPONSIBILITY OF THE CONTRACTOR TO ASSURE THAT THE PROJECT SCHEDULE INCLUDES THE NECESSARY RELOCATIONS. THE CONTRACTOR WILL NOT BE PAID ADDITIONALLY FOR THIS COORDINATION. THE CONTRACTOR SHOULD SEEK ASSISTANCE FROM ALL UTILITY COMPANIES TO LOCATE AND PROTECT THEIR FACILITIES. IF CONFLICTS ARE FOUND, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE OWNER AND DESIGN ENGINEER FOR INSTRUCTION BEFORE PROCEEDING WITH WORK.
- ALL MATERIALS SHALL BE NEW UNLESS USED OR SALVAGED MATERIALS ARE AUTHORIZED BY THE OWNER AND APPLICANT.
- TRAFFIC CONTROL METHODS, SUCH AS BARRICADES, SUFFICIENT LIGHTS, SIGNS, ETC., MAY BE NECESSARY FOR THE PROTECTION AND SAFETY OF THE PUBLIC SHALL BE PROVIDED AND MAINTAINED THROUGHOUT THE CONSTRUCTION IN ACCORDANCE WITH CURRENT AND NC DOT STANDARDS.
- CONTRACTOR SHALL FURNISH AND MAINTAIN ALL NECESSARY BARRICADES, FENCING AND OTHER APPROPRIATE SAFETY MEASURES NECESSARY TO PROTECT THE PUBLIC FROM THE WORK AREA CONSTRUCTION ACTIVITIES.
- HIGH INTENSITY LIGHTING FACILITIES SHALL BE SO ARRANGED THAT THE SOURCE OF ANY LIGHT IS CONCEALED FROM PUBLIC VIEW AND FROM ADJACENT RESIDENTIAL PROPERTY AND DOES NOT INTERFERE WITH TRAFFIC.
- THE CONTRACTOR SHALL MAINTAIN ACCESS FOR EMERGENCY VEHICLES AROUND AND TO ALL BUILDINGS UNDER CONSTRUCTION. IN TIME OF RAIN OR MUD, ROADS SHALL BE ABLE TO CARRY A FIRE TRUCK BY BEING PAVED OR HAVING A CRUSHED STONE BASE, ETC., WITH A MINIMUM WIDTH OF 20 FEET. ACCESS TO BUILDINGS THAT HAVE SPRINKLER OR STANDPIPE SYSTEMS SHALL BE WITHIN 40 FEET OF THE FIRE DEPARTMENT CONNECTOR. (NFPA 1141.3-1)
- BEDDING REQUIREMENTS SPECIFIED HEREIN ARE TO BE CONSIDERED AS MINIMUMS FOR RELATIVELY DRY, STABLE EARTH CONDITIONS. ADDITIONAL BEDDING SHALL BE REQUIRED FOR ROCK TRENCHES AND WET AREAS. CONTRACTOR SHALL HAVE THE RESPONSIBILITY TO PROVIDE SUCH ADDITIONAL BEDDING AS MAY BE REQUIRED TO PROPERLY CONSTRUCT THE WORK.
- BACKFILL OF ALL TRENCHES SHALL BE COMPACTED TO THE DENSITY OF 95% OF THEORETICAL MAXIMUM DRY DENSITY (ASTM D698). BACKFILL MATERIAL SHALL BE FREE FROM ROOTS, STUMPS, OR OTHER FOREIGN DEBRIS AND SHALL BE PLACED IN LAYERS NOT TO EXCEED SIX (6) INCHES IN COMPACTED FILL THICKNESS. A REPORT FROM A GEOTECHNICAL ENGINEER MAY BE REQUIRED BY THE PUBLIC WORKS INSPECTOR. CORRECTION OF ANY TRENCH SETTLEMENT WITHIN A YEAR FROM THE DATE OF APPROVAL WILL BE THE RESPONSIBILITY OF THE CONTRACTOR.
- THE CONTRACTOR WILL ENSURE THAT POSITIVE AND ADEQUATE DRAINAGE IS MAINTAINED AT ALL TIMES WITHIN THE PROJECT LIMITS. THIS MAY INCLUDE, BUT NOT BE LIMITED TO, A) REPLACEMENT OR RECONSTRUCTION OF EXISTING DRAINAGE STRUCTURES THAT HAVE BEEN DAMAGED OR REMOVED, OR B) REGRADING AS REQUIRED BY THE ENGINEER, EXCEPT FOR THOSE DRAINAGE ITEMS SHOWN AT SPECIFIC LOCATIONS AND HAVING SPECIFIC PAY ITEMS IN THE DETAILED ESTIMATE. NO SEPARATE PAYMENT WILL BE MADE FOR ANY COSTS INCURRED TO COMPLY WITH THIS REQUIREMENT.
- THE CONTRACTOR SHALL PROVIDE ANY AND ALL EXCAVATION AND MATERIAL SAMPLES NECESSARY TO CONDUCT REQUIRED SOIL TESTS. ALL ARRANGEMENTS AND SCHEDULING FOR THE TESTING SHALL BE THE CONTRACTOR'S RESPONSIBILITY.
- SOIL TESTING AND ON-SITE INSPECTION SHALL BE PERFORMED BY AN INDEPENDENT GEOTECHNICAL ENGINEER. A GEOTECHNICAL ENGINEER IS REQUIRED TO INSPECT, TEST AND CERTIFY TO THE CONSTRUCTION OF ALL LOAD BEARING FILLS. THE GEOTECHNICAL ENGINEER SHALL PROVIDE COPIES OF TEST REPORTS TO THE CONTRACTOR, THE OWNER AND TO THE OWNER'S REPRESENTATIVE AND SHALL PROMPTLY NOTIFY THE OWNER, HIS REPRESENTATIVE AND THE CONTRACTOR, SHOULD WORK PERFORMED BY THE CONTRACTOR FAIL TO MEET THESE SPECIFICATIONS.
- ALL PERMITS MUST BE OBTAINED PRIOR TO THE START OF CONSTRUCTION.
- ALL PAVEMENT MARKINGS AND REGULATORY SIGNS ON PRIVATE PROPERTY SHALL CONFORM TO CURRENT MUTCD STANDARDS.


WATER AND SEWER SERVICE NOTES:

- HORIZONTAL AND VERTICAL SEPARATION
 - SANITARY SEWERS SHALL BE LAID AT LEAST 10-FOOT HORIZONTALLY FROM ANY EXISTING OR PROPOSED WATER MAIN. THE DISTANCE SHALL BE MEASURED EDGE TO EDGE. IN CASES WHERE IT IS NOT PRACTICAL TO MAINTAIN A 10-FOOT SEPARATION, THE PUBLIC WORKS SUPPLY MAY ALLOW DEVIATION A CASE-BY-CASE BASIS, IF SUPPORTED BY DATA FROM THE DESIGN ENGINEER. SUCH DEVIATION OR MAY ALLOW THE INSTALLATION OF THE SANITARY SEWER CLOSER TO A WATER MAIN, PROVIDED THAT THE WATER MAIN IS IN A SEPARATE TRENCH OR ON AN UNDISTURBED EARTH SHELVE LOCATED ON ONE SIDE OF THE SANITARY SEWER AND AT AN ELEVATION SO THE BOTTOM OF THE WATER MAIN IS AT LEAST 18-INCHES ABOVE THE TOP OF THE SEWER.
 - IF IT IS IMPOSSIBLE TO OBTAIN PROPER HORIZONTAL AND VERTICAL SEPARATION AS DESCRIBED ABOVE OR ANYTIME THE SANITARY SEWER IS OVER THE WATER MAIN, BOTH THE WATER MAIN AND SANITARY SEWER MUST BE CONSTRUCTED OF FERROUS PIPE COMPLYING WITH THE PUBLIC WATER SUPPLY DESIGN STANDARDS AND BE PRESSURE TESTED TO 150PSI TO ASSURE WATER TIGHTNESS BEFORE BACKFILLING.
 - A 18-INCH VERTICAL AND 10-FOOT HORIZONTAL SEPARATION SHALL BE PROVIDED BETWEEN STORM SEWER AND SANITARY SEWER LINES OR FERROUS PIPE SPECIFIED. A 12-INCH VERTICAL SEPARATION SHALL BE PROVIDED BETWEEN STORM SEWER AND WATER MAIN.
 - 3.1. IF A 12-INCH VERTICAL SEPARATION IS NOT MAINTAINED AT A CROSSING BETWEEN STORM SEWER AND WATER MAINS (OR PRESSURE SEWERS), THE WATER MAIN SHALL BE CONSTRUCTED OF FERROUS PIPE AND A CONCRETE COLLAR SHALL BE POURED AROUND WATER MAINS AND STORM SEWER TO IMMOBILIZE THE CROSSING.
- CROSSINGS
 - SANITARY SEWER CROSSING WATER MAINS SHALL BE LAID TO PROVIDE A MINIMUM VERTICAL DISTANCE OF 18-INCHES BETWEEN THE OUTSIDE OF THE WATER MAIN AND THE OUTSIDE OF THE SANITARY SEWER. THE CROSSING SHALL BE ARRANGED SO THAT THE SANITARY SEWER JOINTS WILL BE EQUIDISTANT AND AS FAR AS POSSIBLE FROM THE WATER MAIN JOINTS.
 - WHEN IT IS IMPOSSIBLE TO OBTAIN PROPER HORIZONTAL AND VERTICAL SEPARATION AS STIPULATED ABOVE, ONE OF THE FOLLOWING METHODS MUST BE SPECIFIED:
 - 1.1.1. THE SANITARY SEWER SHALL BE DESIGNED AND CONSTRUCTED OF FERROUS PIPE AND SHALL BE PRESSURE TESTED AT 150-PSI TO ASSURE WATER TIGHTNESS PRIOR TO BACKFILLING, OR
 - 1.1.2. EITHER THE WATER MAIN OR THE SANITARY SEWER LINE MAY BE ENCASED IN A WATER TIGHT CARRIER PIPE, WHICH EXTENDS 10-FEET ON BOTH SIDES OF THE CROSSING, MEASURED PERPENDICULAR TO THE WATER MAIN. THE CARRIER PIPE SHALL BE OF MATERIALS APPROVED BY THE PUBLIC WATER SUPPLY FOR USE IN WATER MAIN CONSTRUCTION.

GENERAL UTILITY NOTES:

- ALL UTILITIES AND SERVICES INCLUDING BUT NOT LIMITED TO GAS, WATER, ELECTRIC, SANITARY AND STORM SEWER, TELEPHONE, CABLE, FIBER OPTIC, ETC. WITHIN THE LIMITS OF DISTURBANCE SHALL BE VERTICALLY AND HORIZONTALLY LOCATED. THE CONTRACTOR SHALL USE AND COMPLY WITH THE REQUIREMENTS OF THE APPLICABLE UTILITY NOTIFICATION SYSTEM TO LOCATE ALL THE UNDERGROUND UTILITIES. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRS OF DAMAGE TO ANY EXISTING UTILITIES DURING CONSTRUCTION AT NO COST TO THE OWNER.
- UTILITY COORDINATION SHALL BE INCLUDED IN THE PROJECT SCHEDULE AND IT IS THE EXPLICIT RESPONSIBILITY OF THE CONTRACTOR TO ASSURE THAT THE PROJECT SCHEDULE INCLUDES THE NECESSARY RELOCATIONS. THE CONTRACTOR WILL NOT BE PAID ADDITIONALLY FOR THIS COORDINATION.
- IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE LOCATIONS AND DEPTHS OF ALL EXISTING UNDERGROUND UTILITIES AND STRUCTURES BEFORE THE START OF WORK AND TO TAKE WHATEVER STEPS NECESSARY TO PROVIDE FOR THEIR PROTECTION. THE ENGINEER HAS DILIGENTLY ATTEMPTED TO LOCATE AND INDICATE ALL EXISTING FACILITIES ON THESE PLANS; HOWEVER, THIS INFORMATION IS SHOWN FOR THE CONTRACTOR'S CONVENIENCE ONLY. THE ENGINEER ASSUMES NO RESPONSIBILITY FOR THE LOCATIONS OF UTILITIES SHOWN OR NOT SHOWN. COMPLETENESS OR ACCURACY OF LOCATION AND DEPTH OF UNDERGROUND UTILITIES AND STRUCTURES IS NOT GUARANTEED.
- THE CONTRACTOR SHALL CONTACT ALL UTILITY COMPANIES FOR EXACT LOCATION AND PROTECTION OF THEIR UTILITIES PRIOR TO STARTING CONSTRUCTION. IT SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR TO REPAIR AND REPLACE ANY AND ALL DAMAGE MADE TO UTILITIES BY THE CONTRACTOR.
- CONTRACTOR MUST APPLY FOR ALL UTILITY CONNECTION APPLICATIONS. CONTRACTOR IS RESPONSIBLE FOR ALL UTILITY CONNECTION FEES FOR CONSTRUCTION. REFER TO COVER SHEET FOR AVAILABLE UTILITY COMPANY LIST.
- CONTRACTOR MUST OBTAIN ANY REQUIRED UTILITY DETAILS FOR RECONNECTION OF EXISTING SERVICE OR NEW SERVICE OR IS RESPONSIBLE FOR THE CONSTRUCTION OF EACH NEW SERVICE PER THE APPROPRIATE UTILITY COMPANY'S SPECIFICATIONS.
- THE CONTRACTOR SHALL COORDINATE LOCATION AND INSTALLATION OF ALL UNDERGROUND UTILITIES AND APPURTENANCES TO MINIMIZE DISTURBANCE TO CURBING, PAVING, AND COMPACTED SUB-GRADE.
- IF CONFLICTS ARE FOUND, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE OWNER AND ENGINEER FOR INSTRUCTION BEFORE PROCEEDING WITH WORK.
- ALL PIPE LENGTHS AND DISTANCES BETWEEN STRUCTURES ARE MEASURED FROM CENTER OF STRUCTURE TO CENTER OF STRUCTURE ALONG A HORIZONTAL PLANE.
- THE CONTRACTOR SHALL PROVIDE ANY AND ALL EXCAVATION AND MATERIAL SAMPLES NECESSARY TO CONDUCT REQUIRED SOIL TESTS. ALL ARRANGEMENTS AND SCHEDULING FOR THE TESTING SHALL BE THE CONTRACTOR'S RESPONSIBILITY.
- SOILS TESTING AND ON-SITE INSPECTION SHALL BE PERFORMED BY AN INDEPENDENT GEOTECHNICAL ENGINEER. THE SOILS ENGINEER SHALL PROVIDE COPIES OF TEST REPORTS TO THE CONTRACTOR, THE OWNER AND THE OWNER'S REPRESENTATIVE AND SHALL PROMPTLY NOTIFY THE OWNER, HIS REPRESENTATIVE

PROJECT: 11/20/17 12:27 PM BY: Donna D'Elia
 PLOT STYLE: Pennoni VCS.dwg
 PROJECT SITE: 15501 (RE) DEVELOPMENT
 P:\Projects\CAROLINA\CS0201\CS0201.dwg

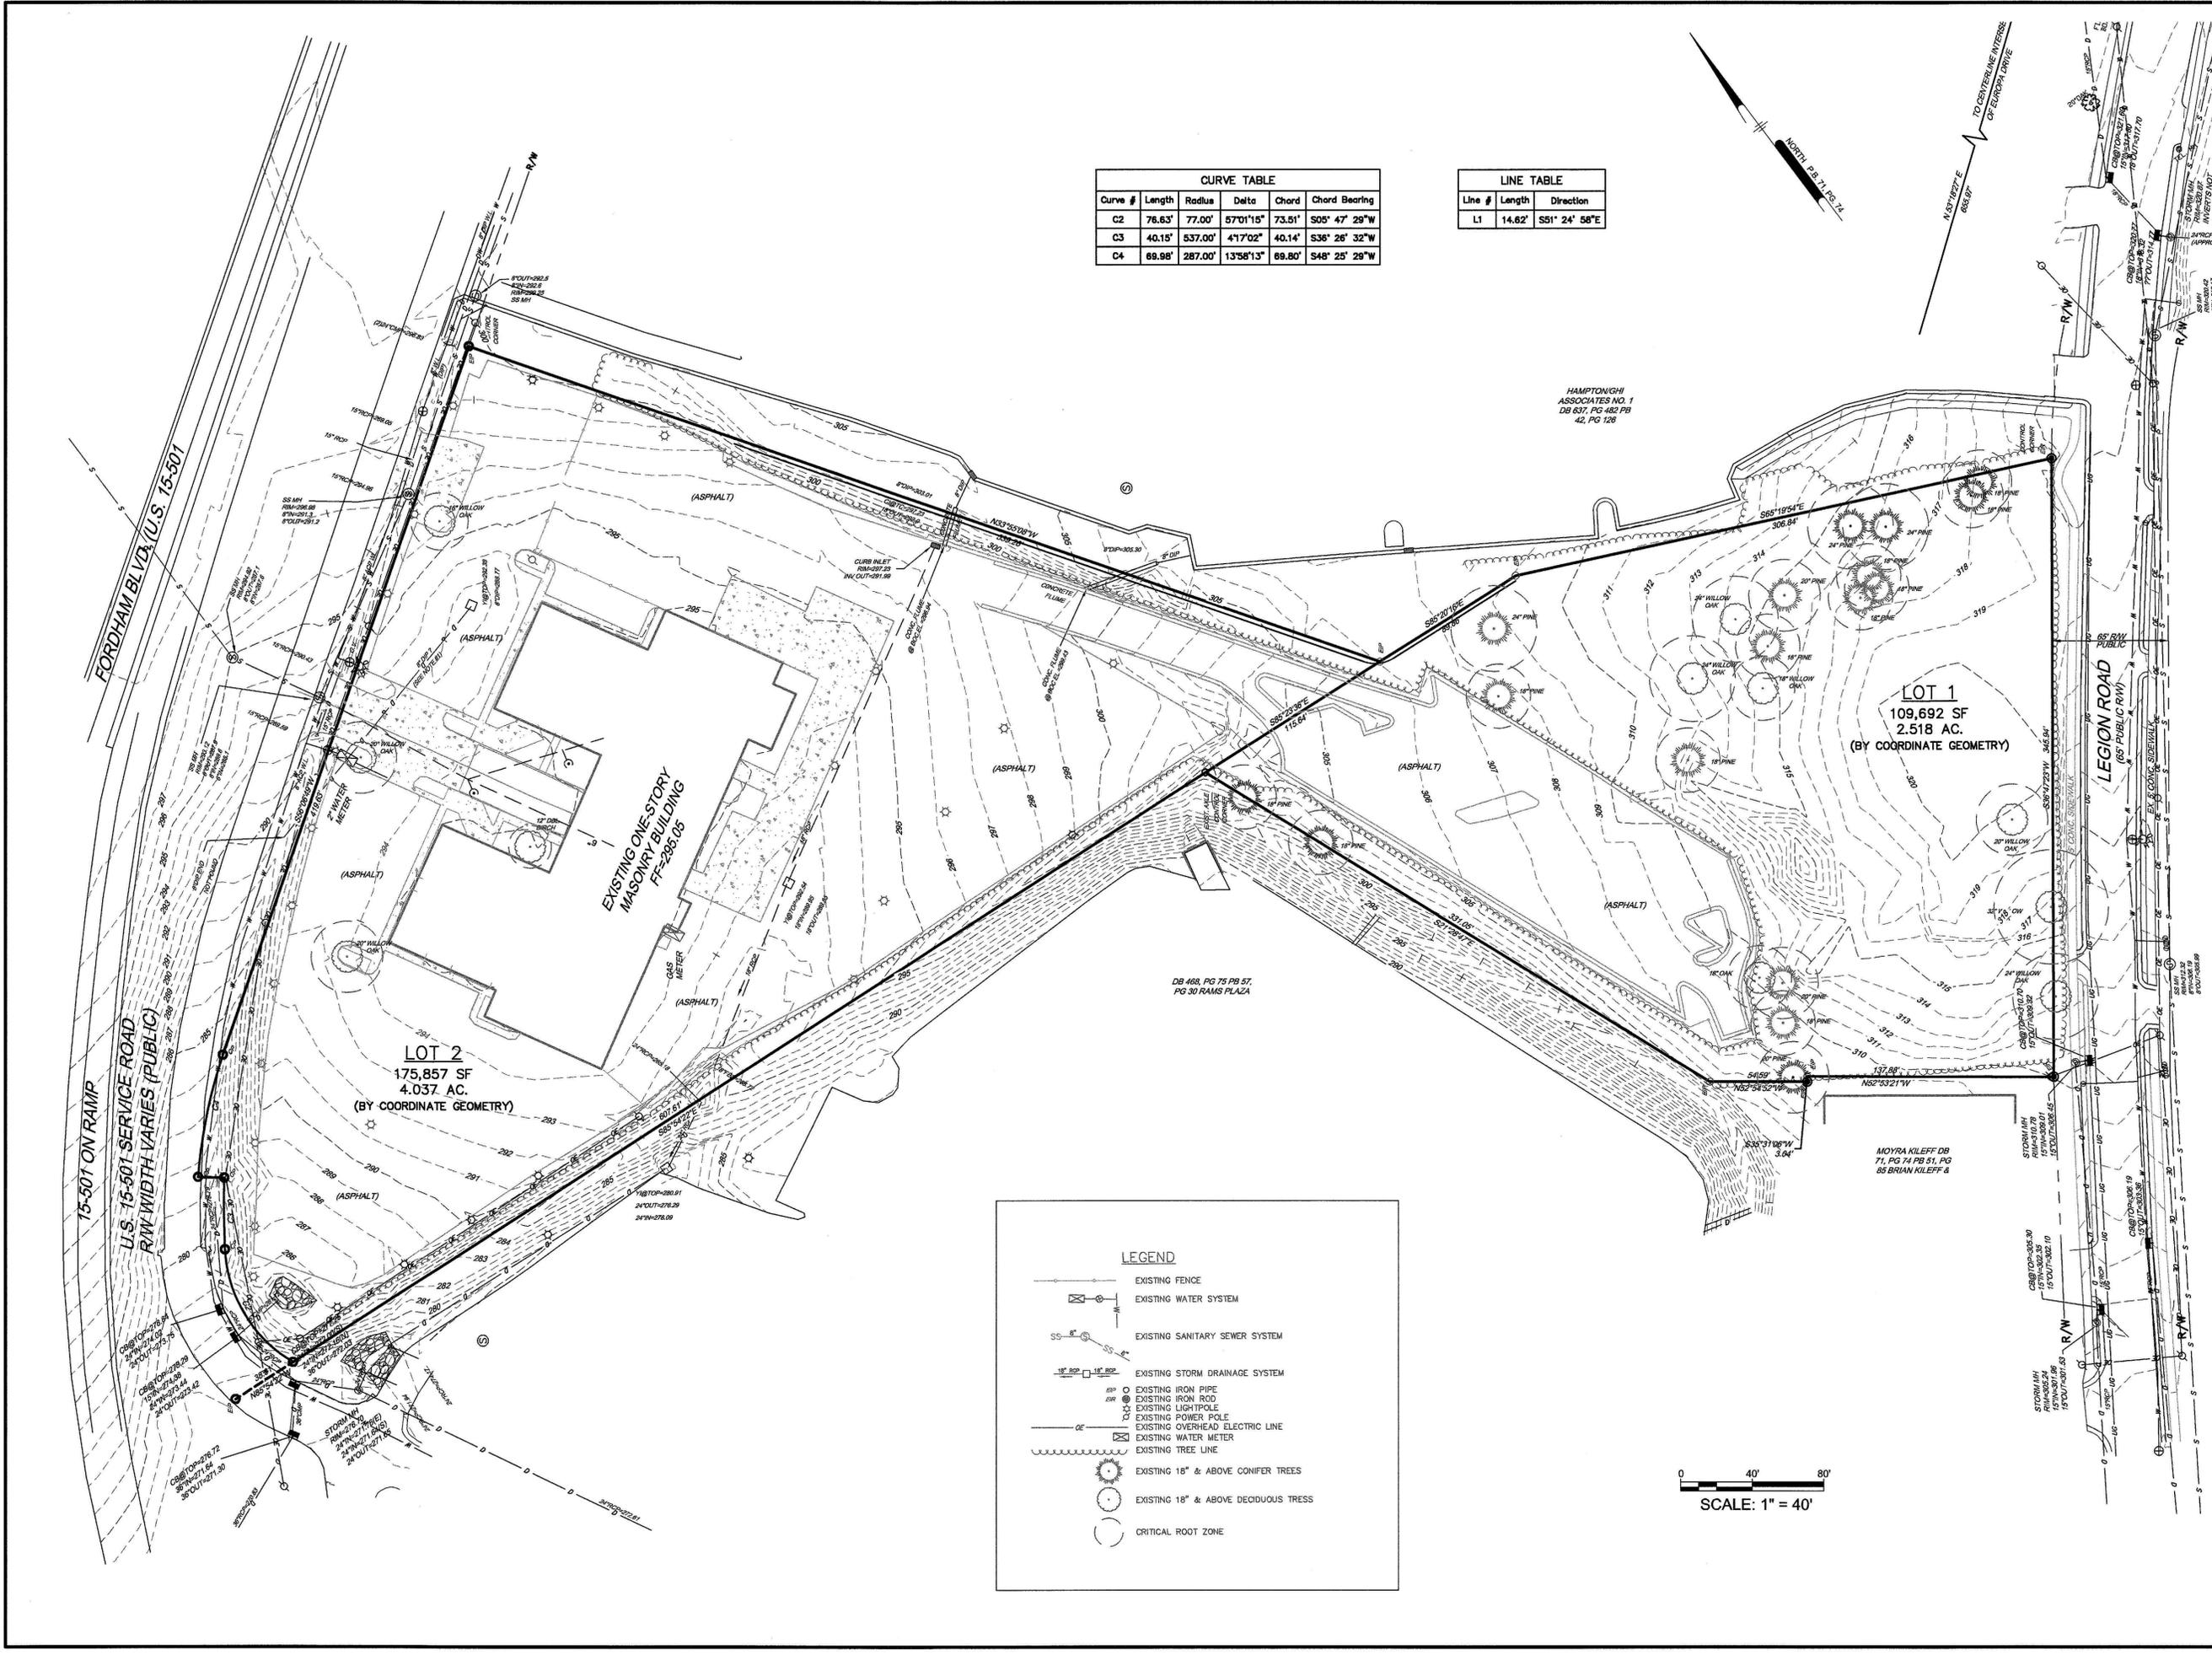

PHILIP POST & ASSOCIATES
A Division of Pennoni
Firm License F-1287
PENNONI ASSOCIATES, INC.
401 Providence Road #200
Chapel Hill, NC 27514
T 919.929.1173 F 919.493.6548

ALL DIMENSIONS MUST BE VERIFIED BY CONTRACTOR AND OWNER MUST BE NOTIFIED OF ANY DISCREPANCIES BEFORE PROCEEDING WITH WORK

NOT FOR CONSTRUCTION
SEAL NO. 630517
EXPIRES 12-31-2024
TIMOTHY W. HARRIS, P.E.

HILLSTONE CHAPEL HILL
1730 FORDHAM BLVD.
CHAPEL HILL, NORTH CAROLINA 27514

EXISTING CONDITIONS PLAN


LEON CAPITAL GROUP
5870 FAIRVIEW ROAD, SUITE 450
CHARLOTTE, NORTH CAROLINA 28210

#	DATE	NO.	REVISIONS	BY
1	4/7/2017	2	TOWN COMMENT REVISIONS REVIEW #2	WRA
2	2/20/2017	1	REVISIONS PER TOWN'S REVIEW COMMENTS	WRA

ALL DOCUMENTS PREPARED BY PENNONI ASSOCIATES ARE INSTRUMENTS OF SERVICE IN RESPECT OF THE PROJECT. THEY ARE NOT INTENDED OR REPRESENTED TO BE SUITABLE FOR REUSE BY OWNER OR OTHERS ON THE EXTENSIONS OF THE PROJECT OR ANY OTHER PROJECT. ANY REUSE WITHOUT WRITTEN VERIFICATION OR ADAPTATION BY PENNONI ASSOCIATES FOR THE SPECIFIC PURPOSE INTENDED WILL BE AT OWNERS SOLE RISK AND WITHOUT LIABILITY OR LACK OF NOTICE TO PENNONI ASSOCIATES. AND OWNER SHALL INDEMNIFY AND HOLD HARMLESS PENNONI ASSOCIATES FROM ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES ARISING OUT OF OR RESULTING THEREFROM.

PROJECT: LCGR1602
DATE: DECEMBER 7, 2016
DRAWING SCALE: 1"=40'
DRAWN BY: WRA
APPROVED BY: TAS

CS0201
SHEET 3 OF 26

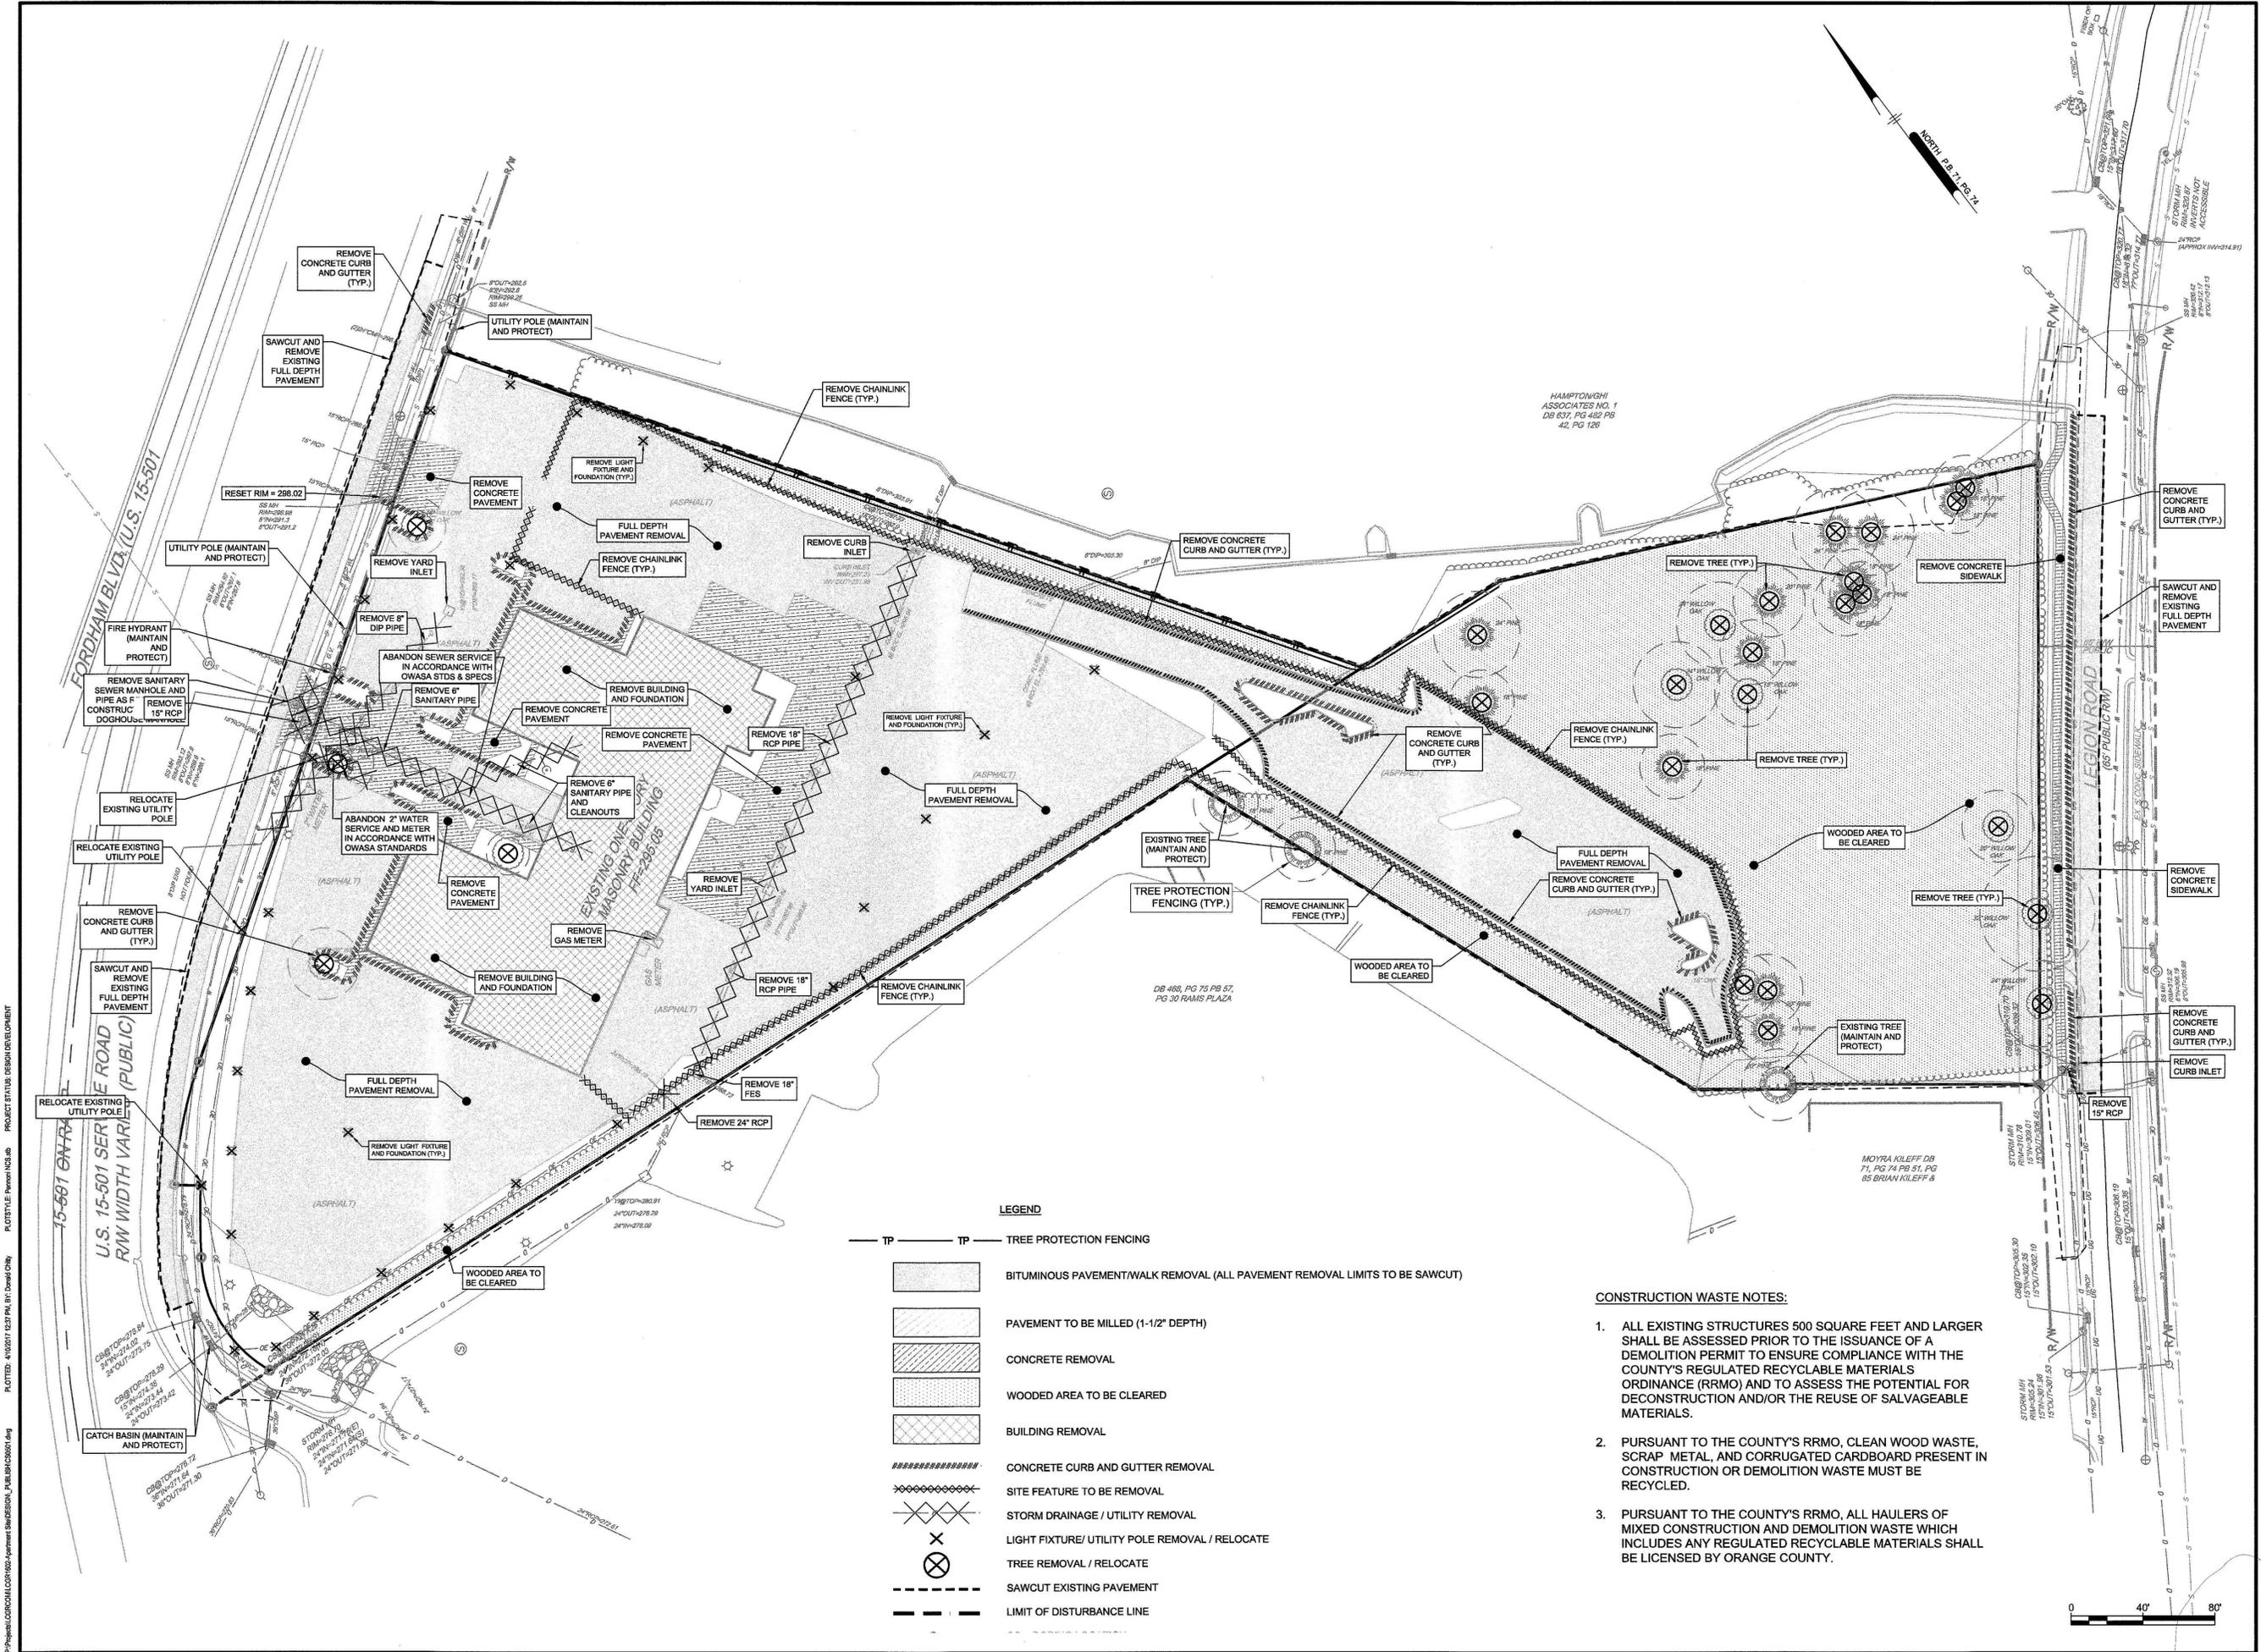

PHILIP POST & ASSOCIATES
 A Division of Pennoni
PENNONI ASSOCIATES INC.
 401 Providence Road #200
 Chapel Hill, NC 27514
 T 919.929.1173 F 919.493.6548

ALL DIMENSIONS MUST BE VERIFIED BY CONTRACTOR AND OWNER MUST BE NOTIFIED OF ANY DISCREPANCIES BEFORE PROCEEDING WITH WORK

NOT FOR CONSTRUCTION

SEAL
 PENNONI ASSOCIATES INC.
 ENGINEER
 TIMOTHY A. 10-1101

HILLSTONE CHAPEL HILL
 1730 FORDHAM BLVD.
 CHAPEL HILL, NORTH CAROLINA 27514

DEMOLITION PLAN

LEON CAPITAL GROUP
 5970 FAIRVIEW ROAD, SUITE 450
 CHARLOTTE, NORTH CAROLINA 28210

#	DATE	NO.	REVISIONS	BY
#	#	#	REVISIONS PER TOWN'S REVIEW COMMENTS	WRA
#	4/7/2017	2	TOWN COMMENT REVISIONS REVIEW #2	WRA
#	2/28/2017	1	REVISIONS PER TOWN'S REVIEW COMMENTS	WRA

ALL DOCUMENTS PREPARED BY PENNONI ASSOCIATES ARE INSTRUMENTS OF SERVICE IN RESPECT OF THE PROJECT. THEY ARE NOT INTENDED OR REPRESENTED TO BE SUITABLE FOR REUSE BY OWNER OR OTHERS ON THE EXTENSIONS OF THE PROJECT OR ANY OTHER PROJECT. ANY REUSE WITHOUT WRITTEN VERIFICATION OR ADAPTATION BY PENNONI ASSOCIATES FOR THE SPECIFIC PURPOSE INTENDED WILL BE AT OWNERS SOLE RISK AND WITHOUT LIABILITY ON LEGAL EXPOSURE TO PENNONI ASSOCIATE, AND OWNER SHALL INDEMNIFY AND HOLD HARMLESS PENNONI ASSOCIATES FROM ALL CLAIMS, DAMAGES, LOSSES AND EXPENSES ARISING OUT OF OR RESULTING THEREFROM.

PROJECT: **LCGR1602**
 DATE: **DECEMBER 7, 2016**
 DRAWING SCALE: **1"= 40'**
 DRAWN BY: **WRA**
 APPROVED BY: **TAS**

CS0501
 SHEET 5 OF 26